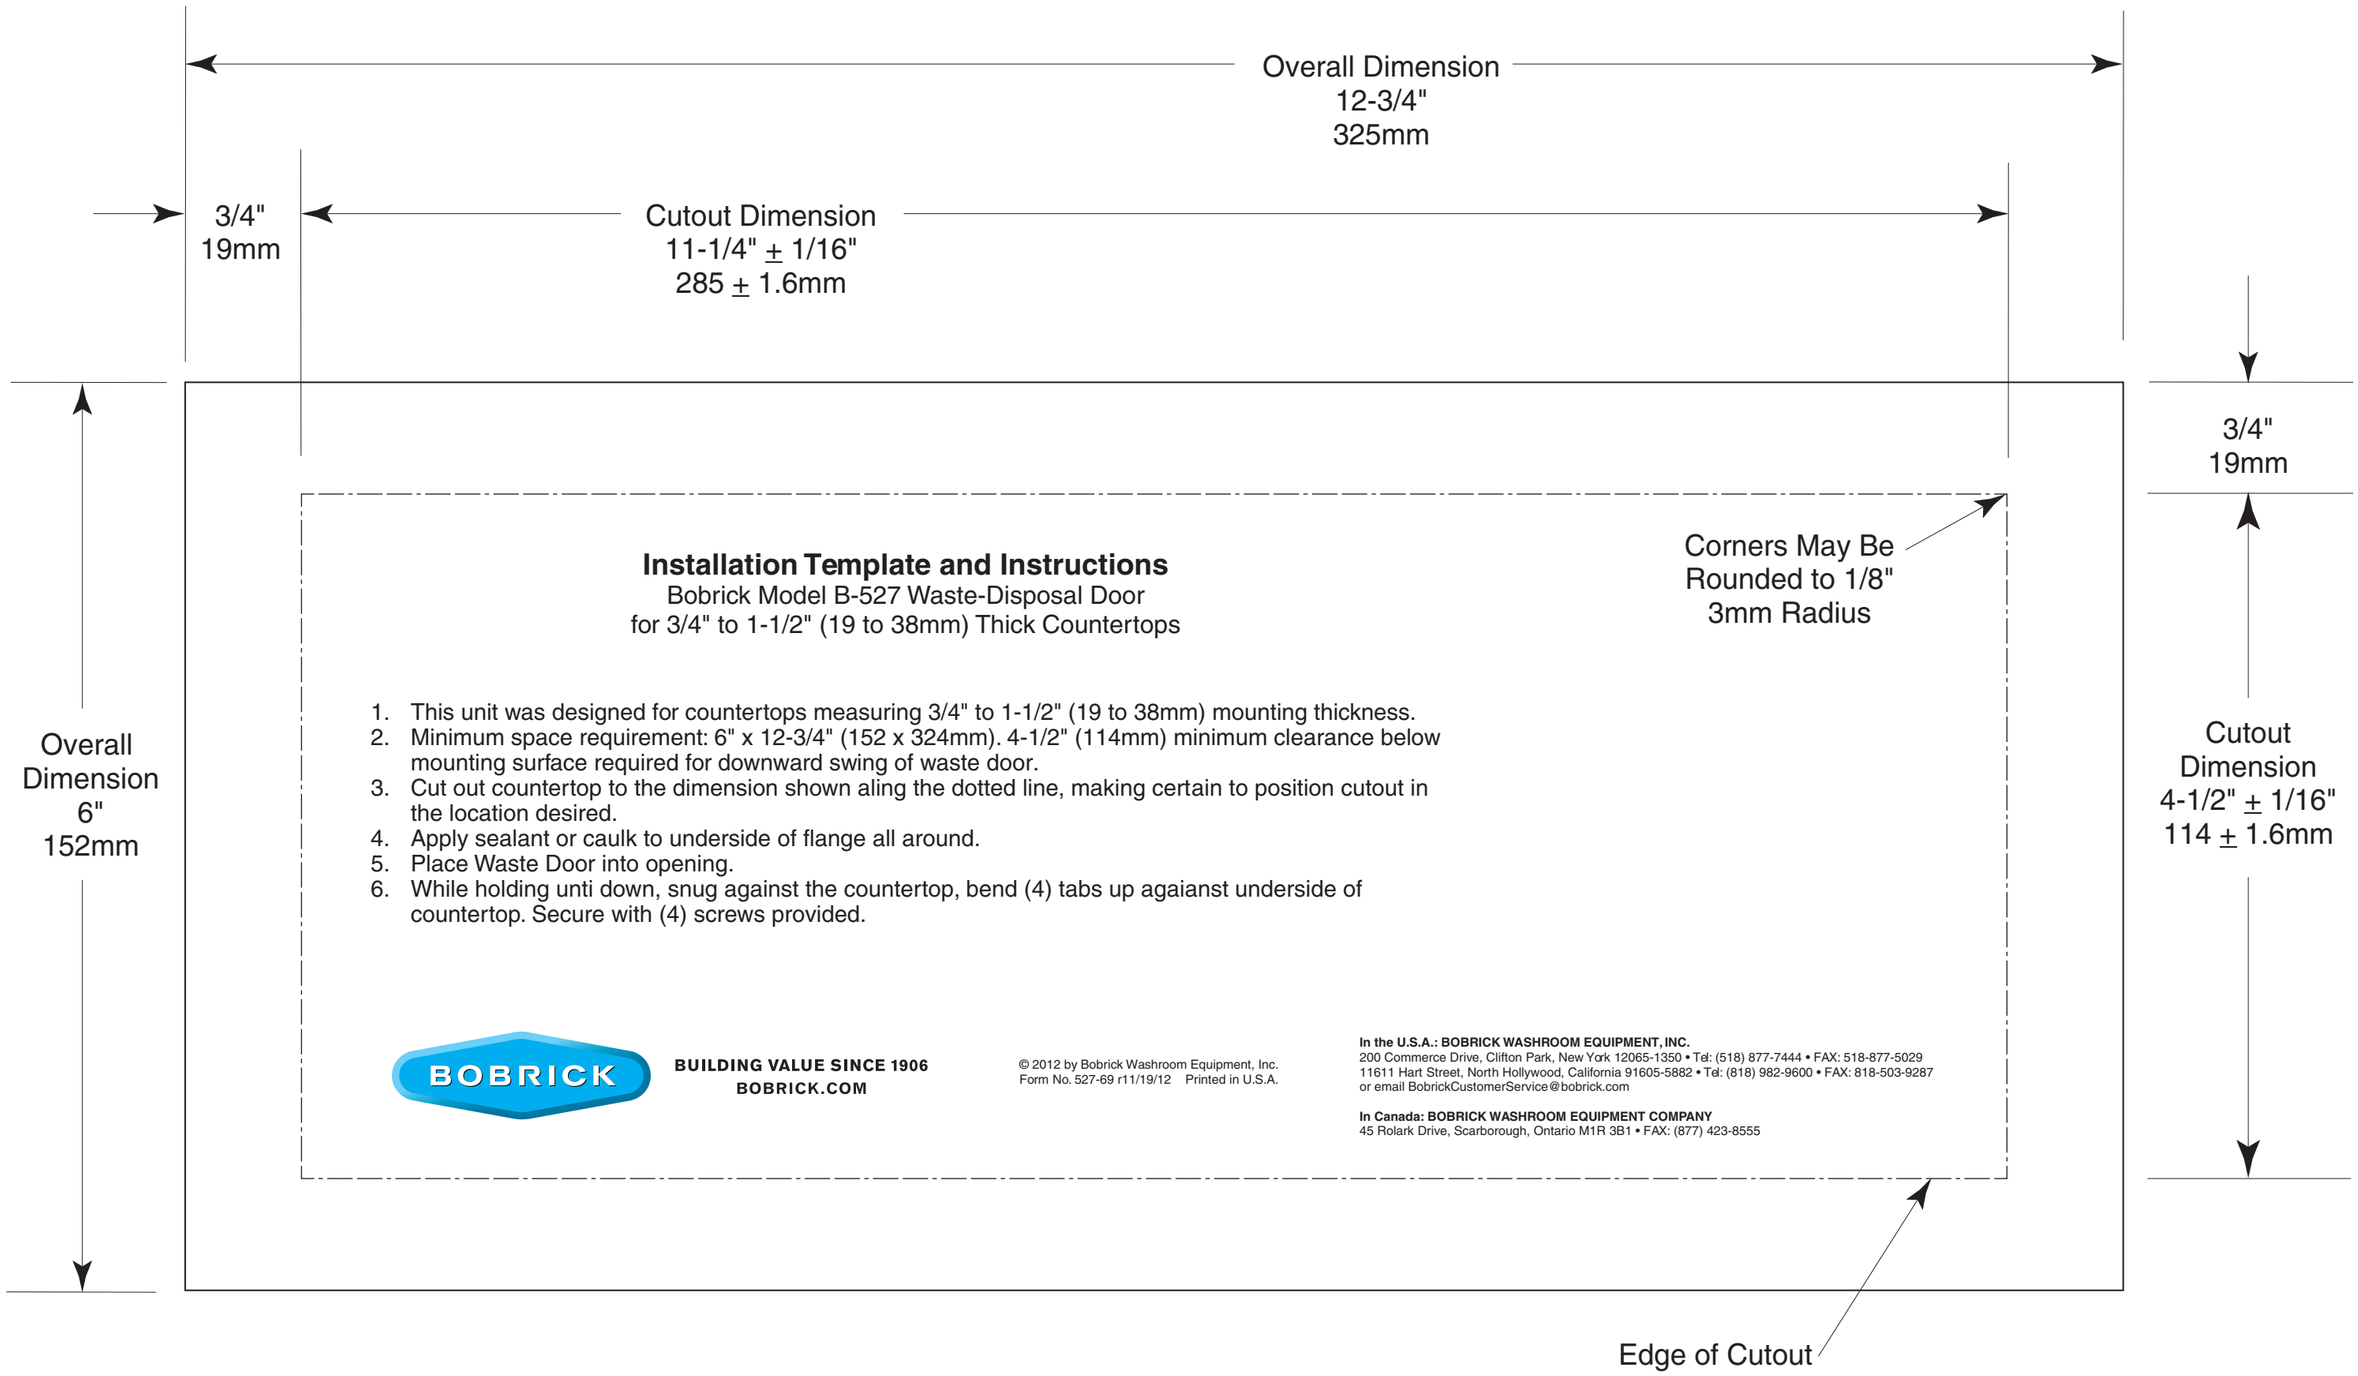

Installation Template and Instructions

Bobrick Model B-527 Waste-Disposal Door
for 3/4" to 1-1/2" (19 to 38mm) Thick Countertops

1. This unit was designed for countertops measuring 3/4" to 1-1/2" (19 to 38mm) mounting thickness.
2. Minimum space requirement: 6" x 12-3/4" (152 x 324mm). 4-1/2" (114mm) minimum clearance below mounting surface required for downward swing of waste door.
3. Cut out countertop to the dimension shown aling the dotted line, making certain to position cutout in the location desired.
4. Apply sealant or caulk to underside of flange all around.
5. Place Waste Door into opening.
6. While holding unti down, snug against the countertop, bend (4) tabs up agaianst underside of countertop. Secure with (4) screws provided.

BOBRICK

BUILDING VALUE SINCE 1906
BOBRICK.COM

© 2012 by Bobrick Washroom Equipment, Inc.
Form No. 527-69 r11/19/12 Printed in U.S.A.

In the U.S.A.: BOBRICK WASHROOM EQUIPMENT, INC.
200 Commerce Drive, Clifton Park, New York 12065-1350 • Tel: (518) 877-7444 • FAX: 518-877-5029
11611 Hart Street, North Hollywood, California 91605-5882 • Tel: (818) 982-9600 • FAX: 818-503-9287
or email BobrickCustomerService@bobrick.com

In Canada: BOBRICK WASHROOM EQUIPMENT COMPANY
45 Rolark Drive, Scarborough, Ontario M1R 3B1 • FAX: (877) 423-8555