

BEFORE YOU START

Where is this door going? _____

Traffic Usage: Low Medium High

Fire Rating: None 45 Min 90 Min 3 hr



**COMMERCIAL
Ordering Checklist**


STEP 1: CHOOSE YOUR FRAME

3 Pc, Knockdown Frames:

18 Gauge




16 Gauge




Welded Frames - 16 Gauge: (Require Anchors)


Throat Size

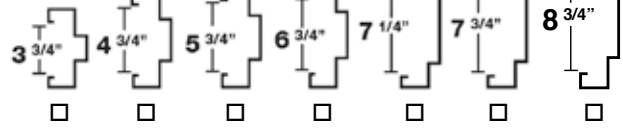


Expandable Frames Field Adjustable for Walls:




XF - Square
Corner
4-1/2" to 7-3/4"




XF Large -
Square Corner
7-5/8" to 12-1/2"



EF1
3-1/2"
to 5-1/4"




EF2
5-3/8" to
8-11/16"



EF3
8-11/16"
to 12"


Wall Anchors
for Welded
Frames:



Masonry Wire
Anchor (WA)



Steel
Building
Anchors
(SBA)



Existing Wood
Wall Anchor (EWA)

 Existing Masonry
Wall Anchor (EMA)



Adjustable
Stud Anchor -
Wood or Steel
Studs
(Anchor A)



Masonry
Tube Shim
Anchor

STEP 2: CHOOSE YOUR DOOR

Door width: 2' 2'4" 2'6" 2'8" 2'10"
 3' 3'2" 3'6" 4'

Door height: 6'8"
 7'

Glass Type:






Tempered Pyran
 Single Glazed Double Glazed

Door gauge:
 20 18 16


Insulated: Yes No
Drill: Double Single No Drill
Prep: Panic Mortise

Standard Door Types:
 F VL NL HG FG FGWR


Handing of Door:



Frame / Door / Hardware Configuration:



Single Drill,
Hinges




Double
Drill,
Hinges




Push/Pull,
Hinges



Single Drill,
Closer Prep,
Hinges



Exit Device,
Closer, Hinges



Single Drill, Lock,
Closer, Flush Bolt,
Hinges



Exit Device, Closer,
Removable Mullion,
Hinges



Exit Device, Flush
Bolts, Hinges

STEP 3: CHOOSE YOUR HARDWARE

- Hinges
- Keyed Lockset
- Passage Set
- Privacy Set
- Deadbolt
- Closer
- Exit Device
- Flushbolt
- Check Chain
- Door Pull
- Push Plate
- Kick Plate
- Weatherstrip / Sweep / Threshold
- Door Viewer
- Door Stop

Notes: _____

Name: _____ Date: _____

Email: _____ Phone: _____