

WORKHORSE COMBO





*Workhorse Combo with Clear glass venting insert.
Pre-finished in Charcoal, Schlage Corona keyed lockset.*

WORKHORSE COMBO

High-Definition Steel Slab
Double-Rabbeted Wood Frame

WORKHORSE STEELCOMP

High-Definition Steel Slab
Double-Rabbeted Composite Frame

WORKHORSE COMBOPLUS

Smooth White Fiberglass Slab
Double-Rabbeted Wood Frame

WORKHORSE FIBERCOMP

Smooth White Fiberglass Slab
Double-Rabbeted Composite Frame

ENTRY SERIES WORKHORSE COMBO

Manufactured in Canada to withstand the Canadian climate.

Sizes: Width: 2/8, 2/10, 3/0 Height: 6/8

Steel or Fiberglass Door Options:

Steel: 24 gauge primed high-definition steel door with polyurethane core in a 6 panel design.

Fiberglass: Smooth white pre-pigmented fiberglass, composite stile and rails, polyurethane core and full-length steel reinforced wood lock block.

The door viewer is factory installed.

Outside Door: A 22" x 36" venting insert with dual, clear glass, raises and lowers for increased airflow. Fixed screen is included.

Drilling: Interior door double drilled. Exterior door is single drilled. Complete with mortised face plate for superior hardware installation.

Pine Wood or Smooth Composite Frame Options:


The frame uses a double-rabbeted jamb system, accommodating two 1-3/4" doors as opposed to a traditional thinner exterior door.

Wood Frame: Kiln dried, finger jointed primed pine jamb, with double rabbet, accommodating two 1-3/4" doors.

Composite Frame: Maintenance free, smooth white composite jamb, laminated to accommodate double rabbet for two 1-3/4" doors.

Depth: 4-9/16", 6-9/16", 8-1/2"

Brickmould: Factory installed

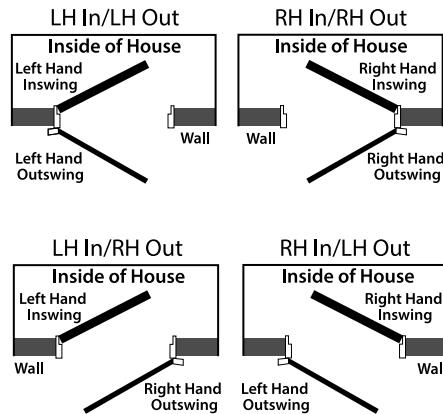

Weatherseal for the Canadian Climate



Fixed aluminum sill in mill finish with composite substrate.

Sill gaskets prevent rain penetration and avoids messy caulking.

Black kerf compression weatherstrip seals tight when the door is closed and expands when opened. Simple Solution Corner Pad seals out air and moisture.

Premium white vinyl adjustable door shoe with rain drip.

Accessories



Ball Bearing Hinges in C-2G zinc finish.



Check chain factory installed to prevent the exterior door from overextending during daily use in windy conditions.



Adjustable strike plates allow for on site adjustment for proper door alignment, as well as providing additional security over traditional strike plates.

DOOR SPECIFICATIONS

Steel Doors

Steel doors have been the choice for residential usage for over 50 years. The variety of new panelled designs have maintained the popularity of the steel door.

5 **YEAR**
Limited
Manufacturer's
Warranty



WORKHORSE COMBO

High-Definition Steel Slab
Double-Rabbeted Wood Frame

WORKHORSE STEELCOMP

High-Definition Steel Slab
Double-Rabbeted Composite Frame

Finish with Ease

Entry doors are supplied with a 24 gauge primed high-definition steel door, requiring no additional paint to achieve a 5 year limited warranty. Doors can easily be painted to match the style of your home - consider factory pre-finishing for your door and frame.



Durability

24 gauge door skins interlock with the stile, providing additional support to reduce delamination and stretching. Steel door skins will not crack or warp, unlike wood.

Strength

A 12" wood lock block provides additional strength and structure to support most residential hardware.

Energy Efficiency

Filled with an insulating core of 100% CFC free polyurethane foam, providing a superior energy rating over a standard styrene core product.

Cost

Steel entry doors are more affordable compared to wood or fiberglass.



Fiberglass Doors

Built for the Canadian Climate

In 2005, Madero partnered with NanYa Plastics, a world leader in the manufacturing of fiberglass, working with Canadian R & D Corp. to develop a maintenance free door and frame system, which meets the climate conditions found within the Canadian market.

25 **YEAR**
Limited
Manufacturer's
Warranty



WORKHORSE COMBOPLUS

Smooth White Fiberglass Slab
Double-Rabbeted Wood Frame

WORKHORSE FIBERCOMP

Smooth White Fiberglass Slab
Double-Rabbeted Composite Frame

Finish with Ease

Smooth white fiberglass doors are supplied in their natural pre-pigmented warm white finish. Though painting is not required to achieve a full 25 year limited warranty, doors can easily be painted to the colour of your choosing.



Durability & Performance

Fiberglass skins are resistant to dents, dings, splintering and corrosion. The rigid structure of our fiberglass doors prevent bowing and warping in extreme temperatures.

Exceptional Security

The full length steel reinforced wood lock block offers a high level of security, while allowing a range of hardware mounting options.

Completely Waterproof

Waterproof composite stiles and rails are sealed and finished to protect all edges of the door from moisture penetration, which can harm the inner insulation and cause rotting.

Energy Efficiency

Filled with an insulating core of 100% CFC free polyurethane foam, providing an excellent R rating, while bonding the two door skins together for additional strength.


CUSTOMIZE YOUR DOOR




Warm White




Charcoal



Colony



Cadet Navy




Ash



Sequin



Stone



Black




Espresso



Smokey Teal



Dusty Sage



Pearled Ivory



Caliente

Pre-Finishing Options

Madero has identified and selected some of the most popular paint and stain colours. Streamline the colour matching process for your project by selecting from Madero's popular colour choices.

Painted swatch colours may vary slightly from actual product. If you are concerned about exact colour match, we recommend you first request a product sample for accuracy. Option to paint one side is available. Specify at time of ordering. Split finish option also available.



Sidelites - Direct Glazed

Enhance your homes curb appeal with the addition of one or two fixed Entry sidelites. These Direct Glazed units allow maximum natural light into your front entryway.

Available Glass Size: 13-1/2" x 79"



Single with left sidelite



Single with right sidelite



Single with two sidelites

Glass Options:



Clear Low-E



Sandblast Low-E

Sandblasting gives this textured glass an elegant surface that allows natural colors to penetrate, blending privacy with natural light. Sandblast gives a similar appearance to Frosted and Transclear. Low-E with Argon. Privacy level 9.

Interior Door Glass

Select any 22" x 36" door glass insert and add to the interior door. The insert matches the size of the exterior vent and will fill your entryway with natural light.



CLEAR LOW-E

PL2337-IE



9 Internal



Mini Blind



Vent



Alys



Pure



Nouveau




SUNBURST

PL2310-5

External white grilles in a five-lite 22" x 10" sunburst design. Natural light filters in, while still maintaining maximum privacy.



Bistro

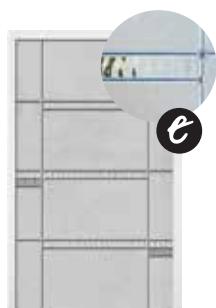

Crosswalk



ROCKGLASS™

Impact Resistance Glass

Madero now offers a high security option while allowing additional light for your entryway.

ROCKGLASS is sound proof, impact resistant and stronger than standard glass. Ranging from 6-12mm, it can replace any glass opening.




Entry Doors



Artisan Doors



Garden Patio Doors

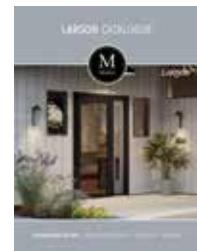

Larson Catalogue



Interior Doors



Multi-Family



Commercial

Contact us at:

madero.ca | canada.orders@madero.ca | 1-800-667-6977

  @maderocanada

Printed & designed by

 TWO SIX
CREATIVE