

HOW TO HANG **HEAVY-DUTY** DOORS

INTRODUCING ONE OF OUR NEWEST PRODUCTS


The Complete Side-Mount **new** Sliding Door System

Custom Systems

KNC has always aimed to make the highest quality sliding door track & hardware. Our continuous side-mounted tracks, a first in Canada, were designed to meet the needs of Canada's top interior designers. Our innovative snap-on/clip-on Fascia products provide significant cost savings and a clean appearance on concealed track applications.



THIS PAGE SHOWS A COMPLETE SIDE-MOUNT SLIDING DOOR SYSTEM. With our **C-108** Track mounted to the wall, the door(s) can be hung using the appropriate hangers as described on pages 38-45. Our heavy-duty **C-913/C-914** Guide System provides stability to the bottom of the door while the **CAS-1** and/or **CAS-2** Stops provide safe, problem free door positioning. The **C-102HD** Floor Stop provides additional stoppage for the bottom of the doors and prevents door from "kicking".

Finally, our **C-110** Fascia snaps into position covering the track and hangers, cutting down on time and expensive labour required to site fabricate a fascia or bulkhead. The **C-110** is available in Clear Anodized aluminum or paint ready primer finish from stock. Baked on enamel finishes are also available to meet job specific requirements.

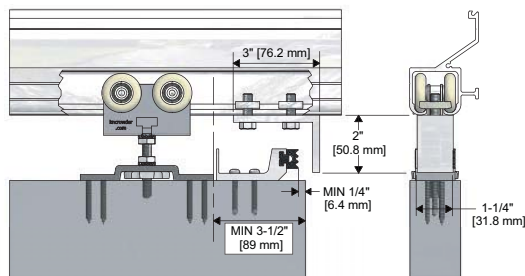

HEAVY-DUTY CENTER STOP

CAS-2 Center Door Stop prevents doors from slamming into each other. (two piece kit which includes C-100HD Stop).

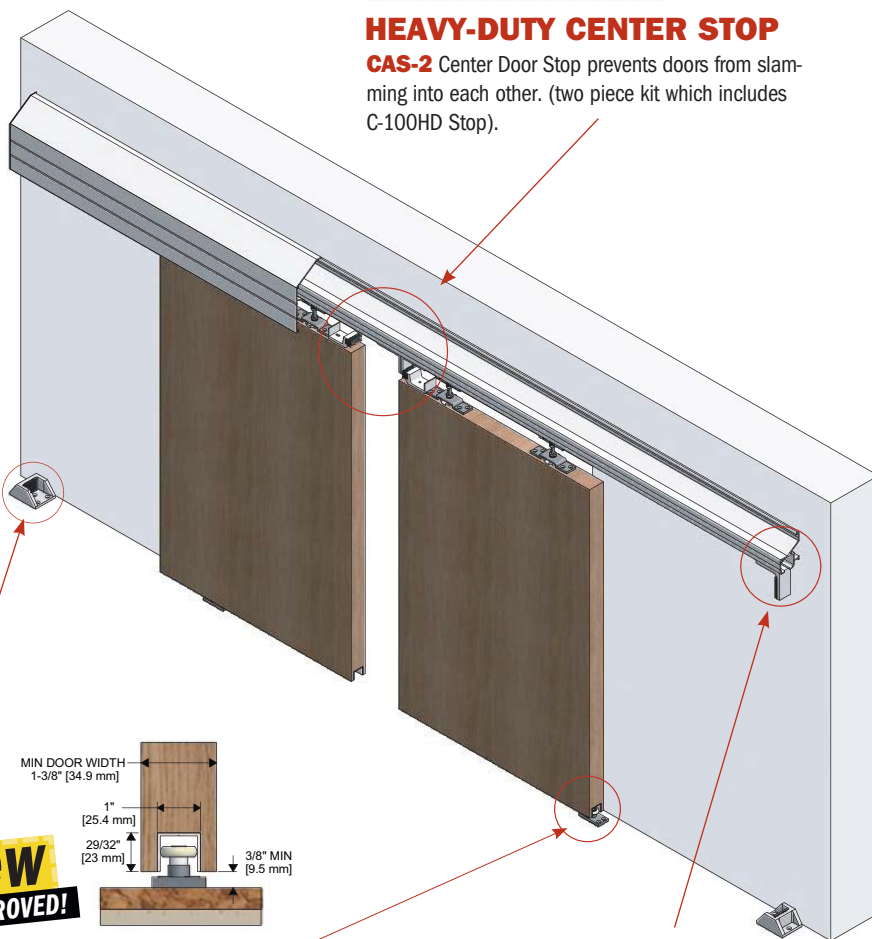


GUIDE SYSTEM

Recessed **C-914** Heavy-Duty Guide Channel and **C-913** Heavy-Duty Roller Guide are floor mounted in overlapping position, eliminating trip hazards on the floor.

NEW: Suitable for 1-3/8" [34.9mm] or thicker door applications.


HEAVY-DUTY END STOP

CAS-1 End Stop prevents door from sliding off end of track.

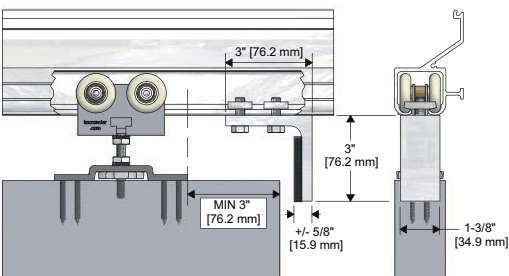

HEAVY-DUTY FLOOR STOP

C-102HD Floor Door Stop for 1-3/4" [44.5mm] doors only, is used to stop and stabilize the bottom of the door.

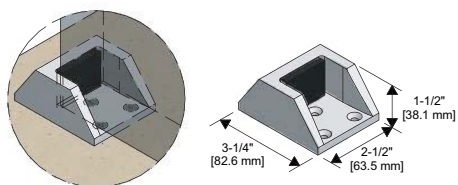


CANTILEVER A DOOR

new

KNC Our Cantilever System allows for a sliding door to be installed over an opening with a gap in the track system for specific needs such as a patient lift tracking system traveling from one room to the next. The Maximum cantilever gap is 8" [203mm].

THIS PAGE SHOWS A COMPLETE SIDE-MOUNT CANTILEVER SLIDING DOOR SYSTEM. With 2 pieces of our **C-108** Track mounted to the wall, the door can be hung using our **C-105-C** or **C-107-C** continuous hanger (same width as door). See page 44 for **C-105-4** with **C-108** or page 42 for **C-107-4** with **C-108** for more details. Our Heavy-Duty **C-914** Guide Channel in conjunction with our **C-913-2** Dual Roller Floor Guide provides stability to the bottom of the door, while the **CAS-1R** Stop provides safe, problem free door positioning. The **C-102HD** Floor Stop provides additional stoppage for the bottom of the doors and prevents door from "kicking".

Finally, our **C-110** Fascia snaps into position covering the track, hangers, and stops, cutting down on time and expensive labour required on-site to fabricate a fascia or bulk head. Our stock **C-110** End Caps are used on the two outside ends of the fascia, and notched **C-110** End Caps are used on the inside of the cantilever gap to cover the track while allowing the hanger to travel through. The **C-110** is available in Clear Anodized aluminum or painted primer finish from stock. Baked on Enamel finishes are also available to meet job specific requirements.

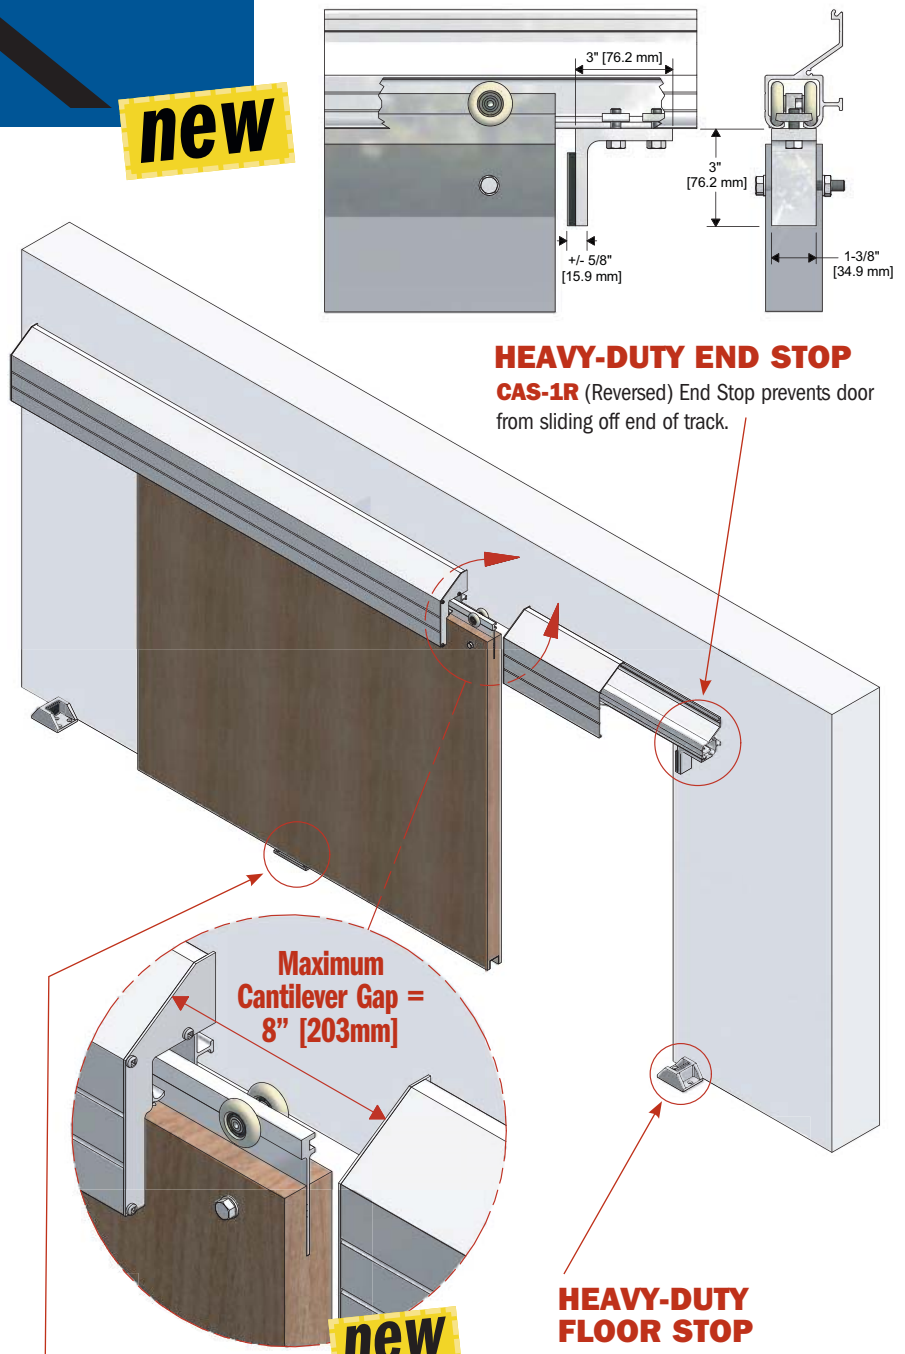


Custom Systems

GUIDE SYSTEM

Recessed **C-914** Heavy-Duty Guide Channel and **C-913-2** Heavy-Duty Roller Guide are floor mounted in an overlap position to eliminate trip hazards on the floor.

NEW: Suitable for 1-3/8" [34.9mm] or thicker door applications.

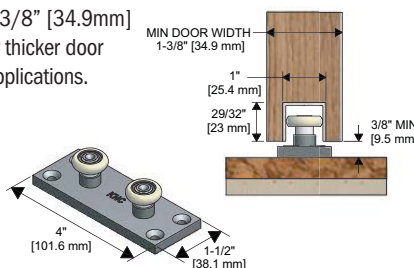

HEAVY-DUTY FLOOR STOP

C-102HD Floor Door Stop for 1-3/4" [44.5mm] doors only, is used to stop and stabilize the bottom of the door.

